

**描述**

- 产品尺寸: 296 x 137 x 68mm
- 水嘴长度: 67mm
- 金属结构, 镀铬和防指纹拉丝镍表面处理工艺
- G1/2 连接接口
- 恒温阀芯设计
- 配备三功能手持淋浴花洒和1500mm淋浴软管

**操作**

- 旋钮操作手柄
- 温度手柄通过237° 的弧度操作  
顺时针旋转达到最大冷, 逆时针旋转达到最大热
- 安全止动预设温度为38°C
- 工厂设定的温度范围为15°C至49°C

**流量**

- 在0.1Mpa下, 水流速在浴缸出水口处最低为 6.0L/min  
使用软管和手持淋浴时约为 4.0 L/min 到 9.0 L/min

**阀芯**

- 温控阀芯设计采用非金属/无铁材料


**执行标准**

(凡不注明日期, 即为最新版本)

- 符合 QB/T 2806


**质保期**

- 阀芯保修期为5年, 其他附件如软管、把手、混水器等保修期均为2年

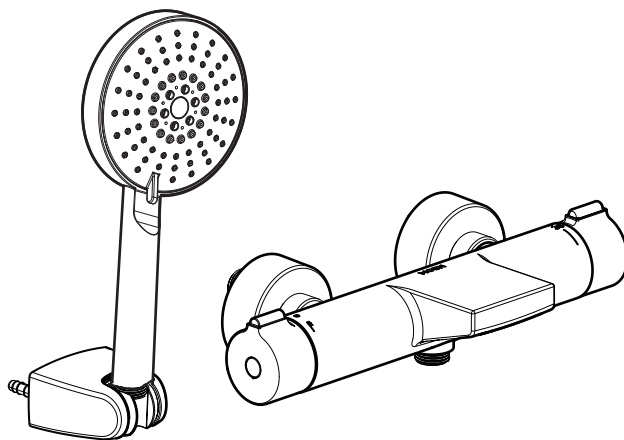**梵溪**

恒温浴缸龙头

型号: 63332 系列

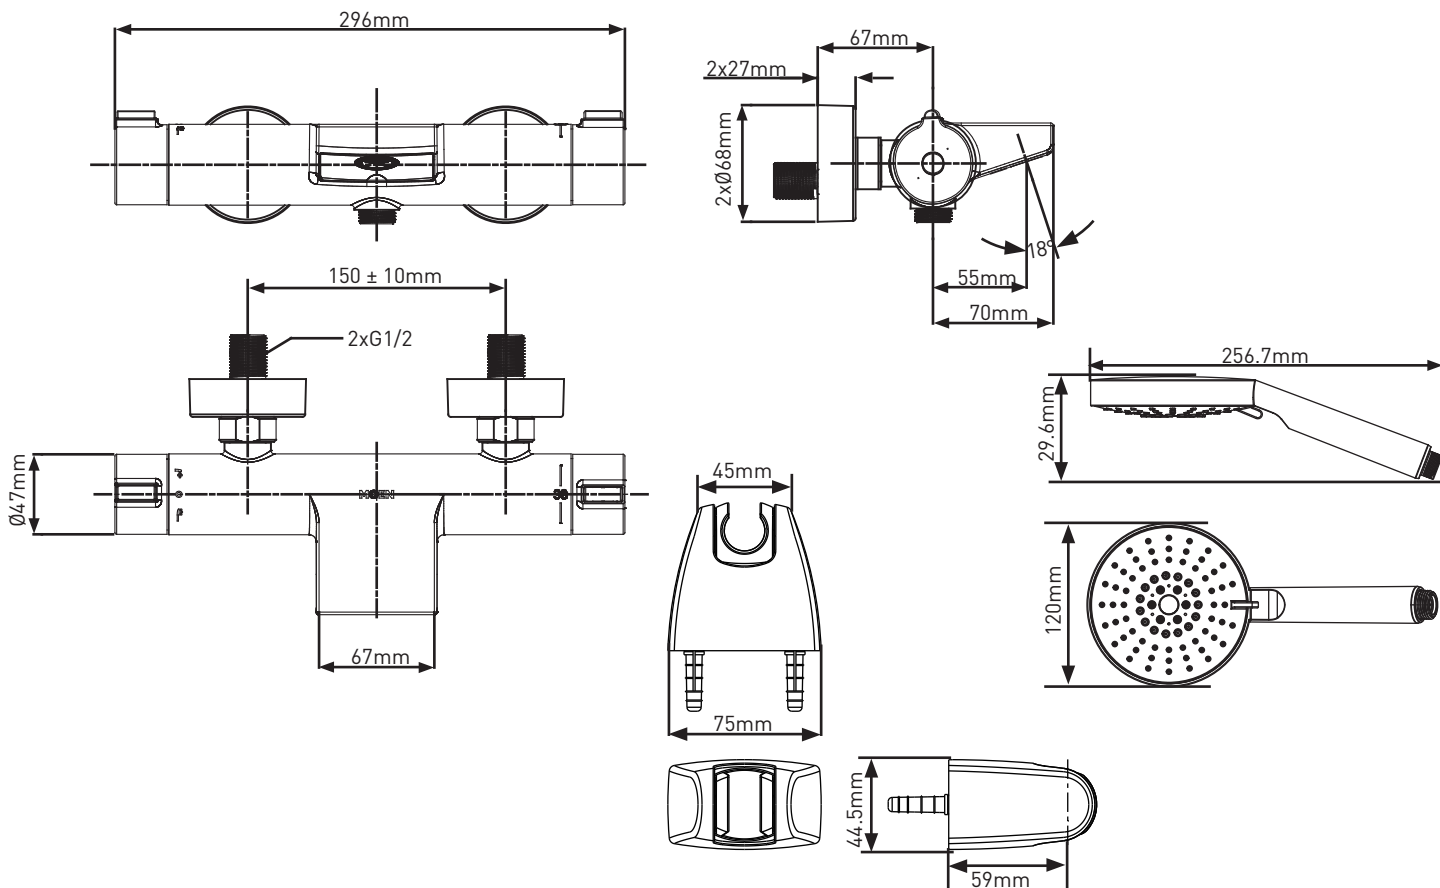

# MOEN® 摩恩®

## SPECIFICATIONS

### DESCRIPTION

- Product Dimensions: 296 x 137 x 68mm
- Reach Length: 67mm
- Metal construction with chrome and spot resistant stainless
- G1/2 connections
- Thermostatic valve design
- Includes 3F hand-held shower and 1500mm shower hose

### OPERATION

- Knob Style handle
- Temperature handle operates through a 237° arc with maximum cold at full clockwise rotation and maximum hot at full counterclockwise rotation
- Safety stop preset temperature at 38°C
- Factory established temperature range from 15°C to 49°C

### FLOW

- Water flow rate at 0.1Mpa is 6.0L/min minimum in tub spout, about 4.0 L/min to 9.0 L/min with hose and handheld shower.

### CARTRIDGE

- Thermostatic cartridge design with Nonmetallic/no-ferrous material


### STANDARDS

(Unless otherwise dated, it is considered to be the latest version)

- Conforms to QB/T 2806

### WARRANTY

- 5-year limited warranty for cartridge
- 2-year limited warranty for other accessories (Including hose, handle, aerator, etc.)

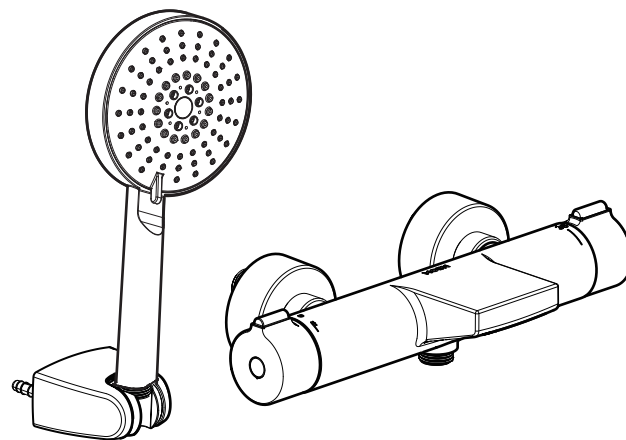

## Fascination

### Thermostatic Tub Shower Faucet

**MODELS:** 63332 series

